

PENTAX

Total Surveying Solutions

- R-322NX
- R-323NX
- R-325NX
- R-335NX
- R-315NX
- R-322EX
- R-323EX
- R-325EX
- R-335EX
- R-315EX
- R-326EX



Pentax R-300X series

Stretching the limits...

R-300X

Applications:


- Surveying
- Construction
- Industrial applications
- Free Station
- Stake Out
- Reference Line / Arc
- Area Calculation
- Tie Distance
- Height transfers
- Inaccessible Points

Precision at the speed of light

The R-300X-series from Pentax incorporates two precise user selectable lasers, made for high inspection throughput and improved measurement efficiency in any possible job. This makes the Pentax R-300X Total Station a versatile measuring system that brings you and your customers important cost savings. These features, together with a measurement time of 0.4 sec in tracking mode and 1.2 sec in quick mode, contribute to an excellent productivity of Pentax R-300X total stations.

Simple operation


All functions are initiated from just five keys. A function that keeps the operation intuitive and logical. Easy-to-use alphanumeric keys (10 keys) allow you to enter quickly specific characters, numbers and other information.

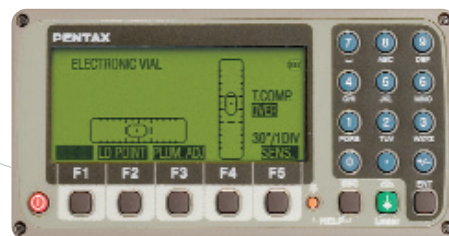


Large memory

The on-board memory of 20,000 measuring points (XYZ) allows you to handle efficiently any measurement and inspection tasks.

Max. 2,000 measuring points (XYZ) can be recorded in one job file. The user can make up to 50 job files.

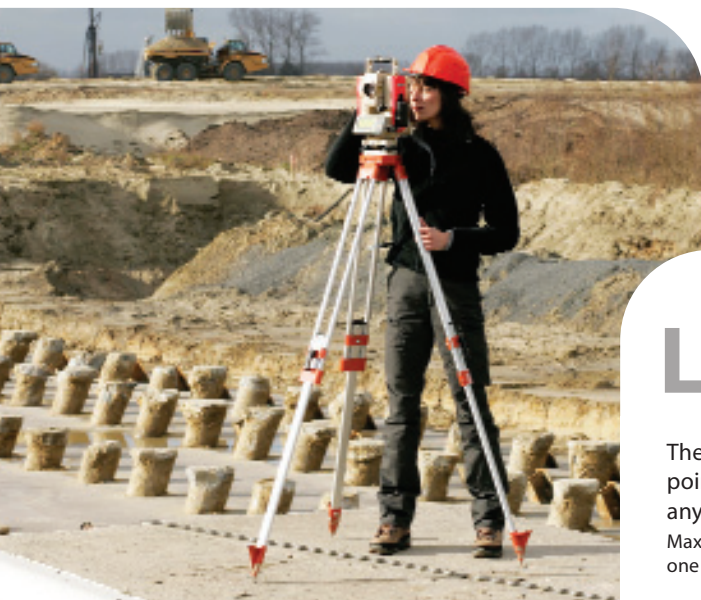

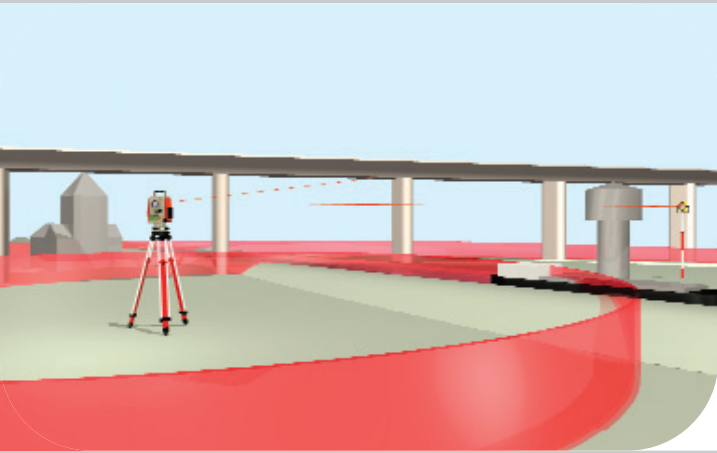

Reflectorless Measurement Mode by Pentax

Innovative Dual Mode EDM Measuring system

No more obstacles on the construction site with Pentax R-300X. Simply select the desired laser mode by striking one of the five function keys and you can measure objects up to 200 meters away without a prism.

Centralize data

The R-300X Total Stations incorporate a clock allowing time and date data to be recorded in the jobfile, making it possible for the user to effectively manage job history.

- Four classes of angular accuracy 2" (0.6mgon); 3" (1mgon), 5" (1.5mgon) and 6" (1.9mgon)
- > 11 models
- > two configurations
- > minimum count of 1"
- > FIT EVERY APPLICATION



On-board software PowerTopoLite

R-300X comes equipped with full-featured PowerTopoLite software that helps you handle your most difficult survey jobs. This powerful software package features an easy-to-use operator interface that guides you through all measuring jobs. PowerTopoLite's architecture provides open access to a number of powerful integrated functions to solve any advanced surveying application.



Reliability made by Pentax: Waterprotection IP56

The R-300X complies with the most stringent international industry standards. It is designed and engineered to ensure accuracy and reliability under the harshest work conditions, at the same time protecting your investment. (The degree of protection against dust and water of the R-300X complies with the International Protection standard IP56 defined following the standard IEC 60529).

Reliable Data Exchange with DL-01

Information is exchanged via a standard RS232 cable. DL-01 software supports all upload and download between PENTAX surveying instruments and PC's. DL-01 allows direct exchange of data from any software. It operates under Windows™ 95, 98, 2000 & NT and Windows XP. Data can be converted into the following formats: Pythagoras files, DXF, JS-Info, TDS, SDR, TAB separated ASCII, DC -1Z, 3 User Definable Formats and various other accepted formats.






R-300X Key features

- **on-board memory:** 20,000 points
- **measurement time to prism/reflector sheet:** 0.4 sec in Tracking Mode and 1.2 sec in Quick Mode setting
- **EDM accuracy:** $\pm (2+2\text{ppm})$ on all models, except R-326EX $\pm (3+2\text{ppm})$
- **Date clock on all non prism models**
- **Reflectorless measuring up to 200 m**
- **Single prism measuring** up to 4,500 m (14,764 ft), with $\pm (2+2\text{ppm})$ accuracy

The noted Pentax features

- **Autofocus (World First Triple Focusing System)**
- **30x magnification of telescope**
- **Large, high resolution screen guarantees a clear display**
- **Intuitive program structure**

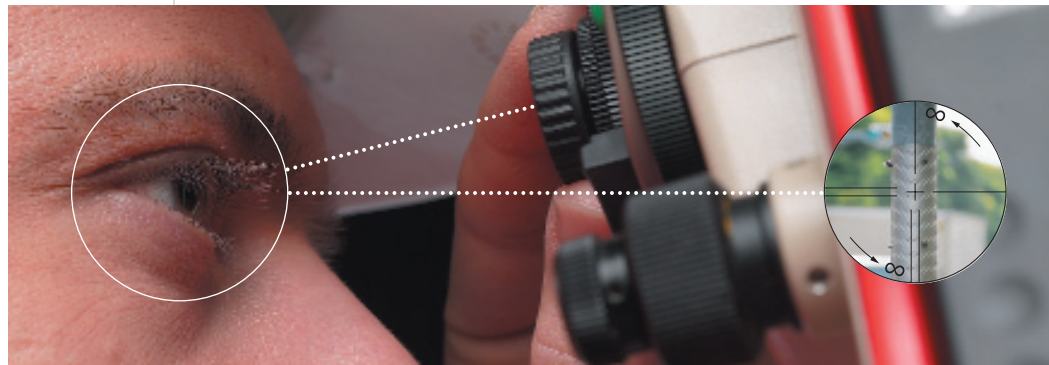

Standard configuration

- **Battery pack**
- **Battery charger**
- **Plumb Bob**
- **A set of tools**
- **Rain cover**
- **Carrying case**
- **Manual**

2nd display standard on R-322(N)X and R-322X, the other models have 1 display. The 2nd display (TA 06) is optional.



optional accessories



Optimal configuration, optimal productivity



- **Four classes of angular accuracy**
2" (0.6mgon); 3" (1mgon), 5" (1.5mgon)
and 6" (1.9mgon)
- **Prismless Auto Focus EDM**
Reflective tapes may also be used as targets
 - Auto Focus [World First Triple Focusing System]
 - World First Dual Prismless Mode EDM [90 / 200m]
 - Telescope with 30x magnification
 - Visible Laser pointer
- **Automatic Atmospheric Correction**
- **Indicator LED for Laser beam**
- **Ni-MH Battery**
With the compact standard camcorder Ni-MH battery (rechargeable DC6V), the R-300X user can go anywhere to measure for up to a whole working day (6 - 12 hours) without having to depend on a power source.
- **Large graphic display**
Large 20 character x 8 line graphic display for simple operation
- **Electronic vial** easy-to-operate through function keys.
- **Incorporated date clock** for more efficient job management
- **Alphanumeric Keyboard**
(10 easy-to-operate keys)
- **Compact and Lightweight**
(12.1lbs / 5.5kg - 12.6lbs / 5.7kg battery incl.)
- **Dual Axis Compensator guarantees** perfect horizontal and vertical alignment and performs fine leveling.
Triple Axis Compensator for R-322 and R-323 models (NX and EX).
- **Highest standard in Waterprotection IP56**
(following the IEC 60529 standard)
- **Laser plummet for easy and quick set-up**
Makes it easy to center over a set up point and step-by-step adjustable intensity of the plummet laser point to critical lighting conditions.

R-300X Series Specifications

Reflectorless items are applicable to "NX" models only

	R-322NX R-322EX	R-323NX R-323EX	R-325NX R-325EX	R-335NX R-335EX	R-315NX R-315EX	R-326EX
Telescope						
Image				Erect		
Magnification				30 X		
Resolving power				3 sec.		
Optical aperture				45 mm (EDM aperture: 45 mm)		
Field of view				1°30' (2,6%)		
Minimum focus				1.0 m		
Recticle illumination				Intensity settings: 10 steps		
Auto focus / Power focus				Yes (and Manual)		No (Manual)
Method				Phase differential		-
Power				Main battery		-
Pointer				Visible laser		
EDM						
Laser class		Visible Laser: Class II (2) / Class IIIa (3R) - long range mode in Reflectorless ("NX" models only)				Visible Laser: Class II (2)
Measurement range (Good condition)		1.5m - Normal range mode: 90m, / Long range mode 200m ("NX" models only)				-
Reflectorless		1.5m - 600m (800m)				
Reflector sheet		1.5m - 1100m (1600m)				
Mini prism		1.5m - 3000m (4000m)				1.5m-2000m (2800m)
1P	1.5m - 3400m (4500m)	200m - 4000m (5000m)				200m-2800m (3500m)
3P	200m - 4500m (5600m)					
Accuracy						
Prism				±(2+2ppm x D)mm		±(3+2ppmxD)mm
Reflector sheet				±(5 + 3ppm x D)mm		-
Reflectorless	±(5 + 2ppm x D)mm	Prism, Ref.sheet: ±(2 + 10ppm x D)mm / Reflectorless: ±(5 + 10ppm x D)mm ("NX" models only)				±(3+10ppmxD)mm
At Auto-Atm. Correction				Fine mode (0.1mm) Normal mode (1 mm) Track mode (1 cm)		
Minimum count						
Measuring time						
Repeat meas.		Normal: Prism, Ref.sheet 2.0sec. (1 mm) Track: Prism, Ref.sheet 0.4sec. (1 cm)		Normal: Prism, Ref.sheet 1.2sec. (1 mm) *Quick mode		
Initial meas.		Normal: Reflectorless 2.3sec. (1mm) ("NX" models only)		Normal: Prism, Ref.sheet 2.5sec. (1mm) *Quick mode		
Target selection						
Non Prism		0 offset				-
Reflector sheet				0 offset / +99 ~ -99 offset		
Prism				0 offset / -30 offset / +99 ~ -99 offset		
Angle Measurement						
Type				Absolute Rotary Encoder		
Method				Horizontal: 2 sides / Vertical: 2 sides		
Accuracy (ISO17123-3)	2"	3"		5"		6"
Minimum count				1"		
Compensator		Triple Axis		Dual Axis		
Display / keyboard						
Display Type				Graphic LCD / 20 alphanumeric 8 lines / 240 x 96 pixels		
Quantity	2			1 (2 nd optional)		
Keys				22 each (12 numeric / 5 function / 5 special)		
Display back light				Intensity settings: 10 steps		
Date Clock						
NX MODEL		Yes		Yes		-
EX MODEL		Yes		No		No
Physical						
Tangent screws		2 speed		1 speed		
Vials						
Plate (electronic)				30" / 1 div.		
Circular				8" / 2 mm		
Plummet				Visible laser		
Accuracy				± 0.8 mm (instrument height 1.5 m)		
Intensity				10 steps		
Base		Tribrach		Shifting	Fixed	Tribrach
Working temperature				-20° C ~ +50° C / -4° F ~ +122° F		
Dust and Water protection				IP56		
Tripod thread				5/8 x 11		
Instrument dimensions				177 (W) x 343 (H) x 177 (L) mm		
Inst. weight (with battery)		5.7 kg / 12.6 lbs		5.5 kg / 12.1 lbs		5.7 kg / 12.6 lbs
Case dimensions				268 (W) x 442 (H) x 465 (H) mm		
Case weight				3.8 kg / 8 lbs		
Battery		Varies by country (standard camcorder battery, Ni-MH rechargeable DC6V)				
Charger		Input voltage AC 100~240V (AC01) Output voltage DC7.5 (BC03)				
Internal Memory						
Coordinates data		20000 points		16000 points		12000 points

- Note:
- * The measurement range may vary by measurement conditions.
 - Normal conditions: 20km visibility with slight shimmer.
 - Good conditions: 40km visibility, overcast, no heat, no shimmer and moderate wind.
 - * Reflector sheet: PENTAX genuine Reflector sheet (5cm x 5cm).
 - * Quick mode, which is effective only under Normal mode (1mm) setting, functions with Prism and Reflector Sheet It is incorporated in all X series models and effective up to 500m.
 - * When Quick Mode is on, the EDM accuracy using Prism and Reflector Sheet is ±(3+2ppmxD)mm. When Automatic Correction is activated in Quick Mode, the EDM accuracy is ±(3+10ppmxD)mm
 - * EDM Measuring time varies according to distance to be measured and conditions of the environment.
 - * Reflectorless:
 - The measurement range and accuracy of Reflectorless are determined by the white side of the Kodak Gray Card.
 - The measurement range may be influenced by the shape of the target and its environment.

Worldwide Headquarters Japan
PENTAX Industrial Instruments Co., Ltd.
 2-5-2, Higashi-Oizumi,
 Nerima-ku,
 Tokyo 178-0063, Japan
 Phone: +81 (3) 5905 1222
 Fax: + 81 (3) 5905 1225
www.pentax.co.jp/ppc

European Headquarters
PENTAX Technologies Europe-Surveying Div.
 Weiveldlaan 3-5
 B-1930 Zaventem, Belgium
 Phone: +32 (0)2.306.11.11
 Fax: +32 (0)2.306.11.99
 E-mail: info_survey@pentaxeurope.com

CAUTION
 LASER RADIATION - DO NOT STARE INTO BEAM OR VIEW DIRECTLY WITH OPTICAL INSTRUMENT INTO SUNLIGHT
 620-690 nm/0.95mW max.
CLASS II LASER PRODUCT
 Laserclass II, conform FDA 21 CFR Ch. 1 § 1040

DANGER
 LASER RADIATION - DO NOT STARE INTO BEAM OR VIEW DIRECTLY WITH OPTICAL INSTRUMENT INTO SUNLIGHT
 620-690 nm/4.95mW max.
CLASS IIIa LASER PRODUCT
 Laserclass IIIa, conform FDA 21 CFR Ch. 1 § 1040



Member symbol of the Japan Surveying Instruments Manufacturers' Association representing the high quality surveying products.

Visit the R-300X series at: www.pentaxR300X.com

Your Official Pentax Dealer



for your precious moments